




FULLY EXTENDED LENGTH (NOT RIDE HEIGHT)

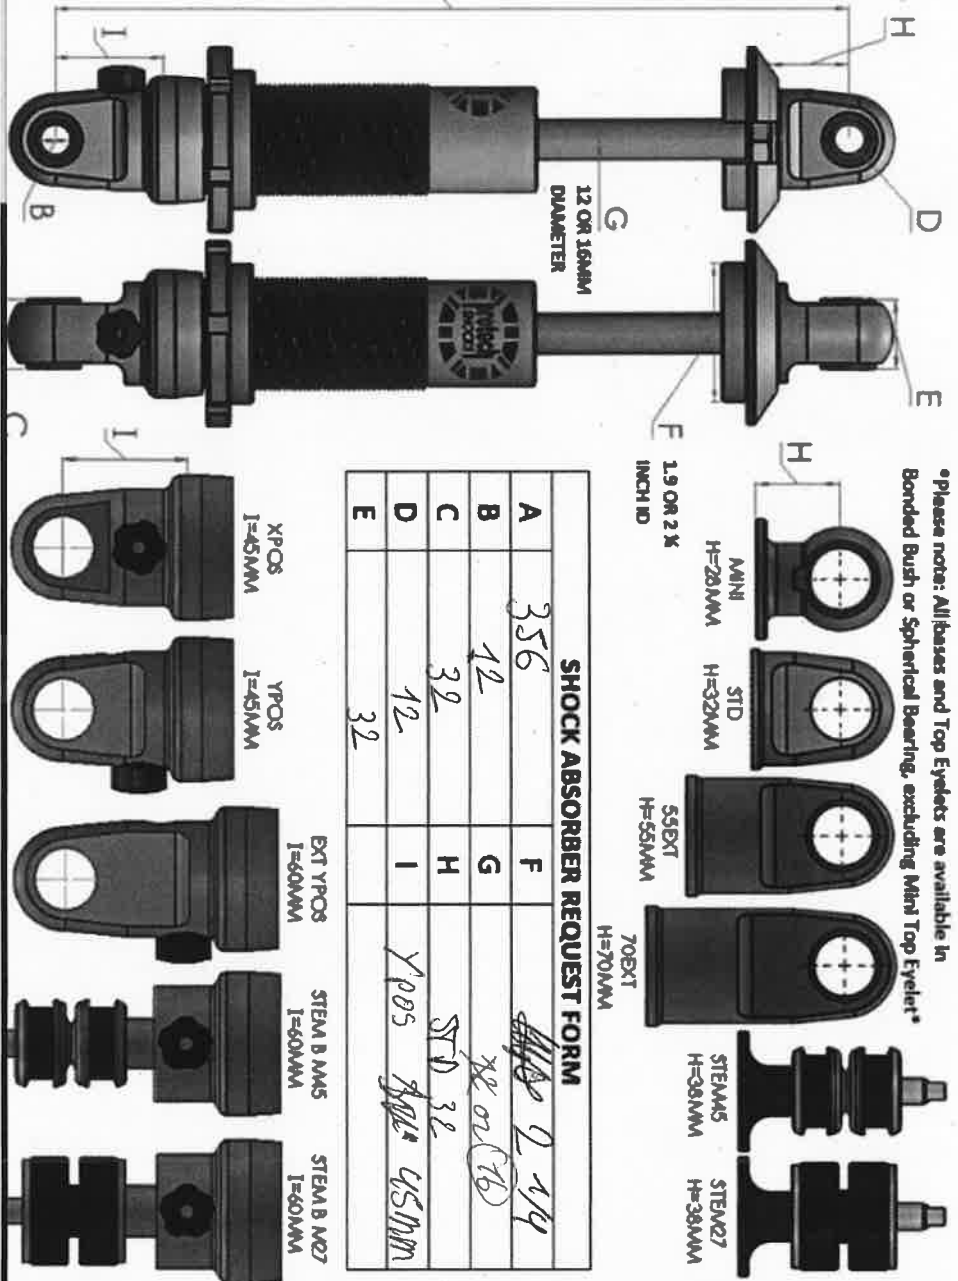

Please note: Allbases and Top Eyellets are available in Bonded Bush or Spherical Bearing, excluding Mini Top Eyellet*

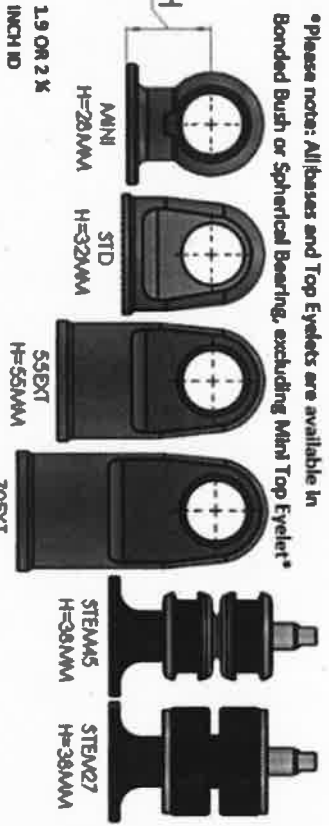

| SHOCK ABSORBER REQUEST FORM | | | |
|-----------------------------|-----|---|---------------------|
| A | 356 | F | <i>2-1/4</i> |
| B | 12 | G | <i>7/8 or 16</i> |
| C | 32 | H | <i>STD 32</i> |
| D | 12 | I | <i>YPOS 32 45mm</i> |
| E | 32 | | |

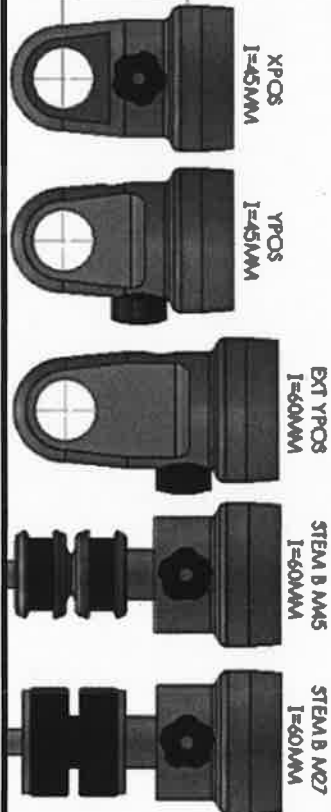

STANDARD OPEN LENGTHS - PLEASE PHONE FOR CUSTOM SIZING

| OPEN LENGTH METRIC | OPEN LENGTH IMPERIAL | CLOSE METRIC | CLOSE IMPERIAL | STROKE METRIC |
|--------------------|----------------------|--------------|----------------|---------------|
| 254 | 10" | 197 | 7 3/4" | 57 |
| 267 | 10 1/2" | 209 | 8 1/4" | 58 |
| 280 | 11" | 209 | 8 1/4" | 71 |
| 292 | 11 1/2" | 216 | 8 1/2" | 78 |
| 305 | 12" | 222 | 8 3/4" | 83 |
| 318 | 12 1/2" | 222 | 8 3/4" | 96 |
| 330 | 13" | 234 | 9 1/4" | 96 |
| 343 | 13 1/2" | 242 | 9 1/2" | 101 |
| 356 | 14" | 247 | 9 3/4" | 109 |
| 368 | 14 1/2" | 253 | 10" | 115 |
| 381 | 15" | 266 | 10 1/2" | 115 |
| 394 | 15 1/2" | 266 | 10 1/2" | 128 |
| 406 | 16" | 273 | 10 3/4" | 133 |
| 419 | 16 1/2" | 283 | 11 1/4" | 136 |
| 432 | 17" | 283 | 11 1/4" | 149 |
| 445 | 17 1/2" | 296 | 11 3/4" | 149 |
| 458 | 18" | 296 | 11 3/4" | 162 |
| 470 | 18 1/2" | 310 | 12 1/4" | 160 |
| 483 | 19" | 310 | 12 1/4" | 173 |
| 495 | 19 1/2" | 310 | 12 1/4" | 185 |
| 508 | 20" | 323 | 12 3/4" | 175 |
| 521 | 20 1/2" | 323 | 12 3/4" | 188 |
| 533 | 21" | 333 | 13 1/4" | 200 |
| 546 | 21 1/2" | 352 | 13 7/8" | 194 |
| 559 | 22" | 352 | 13 7/8" | 207 |
| 572 | 22 1/2" | 362 | 14 1/4" | 220 |
| 584 | 23" | 369 | 14 1/2" | 215 |
| 597 | 23 1/2" | 369 | 14 1/2" | 228 |
| 609 | 24" | 388 | 15" | 226 |

1.09 = 48.3 mm
2.14 = 54.15 mm